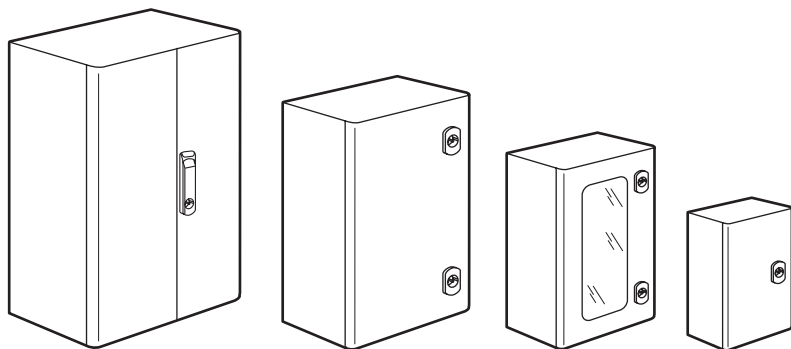


Atlantic stainless steel cabinet

Cat. Nos: 352 00/01/02/03/04/05/06/07/08/09/11/12/13/14/15/16
352 21/22/23/25/26/31/33/40/41/42/45/46/47/53


CONTENTS

Page

1. General characteristics	1
2. Materials	1
3. Finishing	1
4. Range	1-2
5. Properties of stainless steel	2
6. Overall dimensions	3
7. Effective surface areas	3-4
8. Fixing equipment	4
9. Equipment positioning	4-5
10. Equipment	5-10
11. Accessories	11

1. GENERAL CHARACTERISTICS

Stainless steel metal cabinets.

Protection index concerning protection from liquids and solid bodies:

- according to the IEC EN 60529 standard: IP 66 and IP 55 for two-door cabinets,
- according to the NEMA 250 standard: type 4x and type 12 for two-door cabinets.

Protection index IK 10 concerning protection against mechanical impact according to the IEC EN 62262 standard (EN 50102).

Approvals: UL, CSA, Bureau Veritas, LRS. LCIE No. 80257 - 575296.

IEC 60721-3-4 classification:

- climatic conditions: 4K4,
- biological conditions: 4B1,
- presence of chemical agents: 4C3.

2. MATERIALS

Austenitic stainless steel casing (non-magnetic):

- 304 L <=> Z3 CN 18-9, 12-02
- 316 L <=> Z3 CND 17-11-2,
- Steels with the same composition are sometimes given different designations depending on the standards in force in their country of origin:

Country	Standards	Grade of steel	
		Low-carbon grade austenitic alloy	Low-carbon grade austenitic molybdenum alloy
United States	AISI	304 L	316 L
United States	UNS	S 30403	S 31603
Europe	EN 10088-2 (1195)	X2CrNi18-9	X2CrNiMo17-12-2
Europe	Code number	1.4307	1.4404
UK	BS 1554 (1990)	304 S 11	316 S 11
Germany	Previous standard	1.4307	1.4404
France	NF A 35-573 (1990)	Z 3 CN 18-10	Z 2 CND 12-02
France	Previous standard	Z 2 CN 18-10	Z 2 CND 17-11
France	Ugine brand	NS 22 S	NSM 21 S
Sweden	MNC 900E (1985)	SIS 2352	SIS 2348
Japan	JIS G 4304 (1987)	SUS 304 L	SUS 316 L

Door seal: 16 x 8 mm polyurethane foam.

3. FINISHING

Vertical brushed stainless steel:

180-grain polished (conform to NF E 05-015):

- $0.25 \mu\text{m} \leq \text{Ra} \leq 0.35 \mu\text{m}$,
- $2.5 \mu\text{m} \leq \text{Rt} \leq 4 \mu\text{m}$.


Upper and lower protective hoods.

Door with rounded vertical sides. Non-reversible door.

3. FINISHING (continued)

Cabinets with window:


- safety glass window, thickness 4 mm,
- fixed to the door with adhesive ensuring weatherproof seal.



Cabinets dimension	Window dimensions (mm) (H x W)	
400 x 300 x 200	300	128
500 x 400 x 200	400	228
600 x 400 x 250	500	
700 x 500 x 250	600	328
800 x 600 x 300	700	428
1 000 x 800 x 300	850	628

Closing by double bar lock(s):

- Epoxy finish,
- 304 L cabinet: zamak-coated recess,
- 316 L cabinet: 304 L steel coated recess.



4. RANGE

4.1 Listed cabinets

	Stainless steel cabinets 304 L		Stainless steel cabinets 316 L	dimensions		
	Without window	With window	Without window	Height	Width	Depth
Vertical 1-door version	352 00 ⁽¹⁾		352 40 ⁽¹⁾	300	200	160
	352 01	352 21	352 41	400	300	200
	352 02	352 22	352 42	500	400	
	352 03	352 23		600		
	352 05	352 25	352 45		500	250
	352 06	352 26	352 46	700		
	352 11	352 31	352 47	800	600	300
	352 13	352 33	352 53	1000	800	
	352 14			1200		
	352 15			1400		400
Vertical 2-door version	352 16			1200	1000	300
Square version	352 07			400	400	200
	352 09			600	600	250
	352 12			800	800	300
Hori- zontal version	352 04			300	400	200
	352 08			400	600	250

⁽¹⁾ Supplied complete with plain plate

4. RANGE (continued)**4.2 Custom cabinet on request****4.2.1 Open-back cabinets**

Back section cut away, leaving a 25 mm margin either with or without an equipment fixing area.

4.2.2 Cut-outs and drillings

On the body

On the doors.

On plain plates.

Custom windows.

4.2.3 Equipment

Lina 12.5 or Lina 25 plain plates.

Fixing lugs.

Inner doors.

Fan installations.

4.2.4 Cable entry plates

Warning: adding a cable entry plate provides an IP55 protection index against liquids and solid bodies.

With or without cable entry.

Top/ Bottom positioning.

Installation of a Cabstop™ plate.

4.2.5 Closure

The universal closing fixtures provide a wide range of possible closing options.

Please contact us for individual configurations.

5. PROPERTIES OF STAINLESS STEEL**5.1 Resistance to chemical agents**

AISI designation (indicative)	304 L ⁽¹⁾	316 L ⁽²⁾
ISO EN 10088-2 designation	1.4307	1.4404
<i>Standardized chemical composition</i>	<i>X2CrNi18-9</i>	<i>X2CrNiMo17-12-2</i>
Chemical agents		
Fresh water, humid air	++	++
Slightly acidic distilled water	++	++
Salt water and spray	+	++
Ammonia water, all concentrations	++	++
Bleach (sodium hypochlorite) diluted to 0.3%	+	++
Lime potash (potassium hydroxide) 50%	++	++
Sodium potash (sodium hydroxide) 50%	++	++
Acetic acid - all concentrations	++	++
Concentrated vapours with condensation	+	+
ACitric acid < 50%	++	++
Citric acid > 50%	+	++
Lactic acid - all concentrations	++	++
Formic acid - all concentrations	++	++
Hydrochloric acid < 1%	-	++
Hydrochloric acid > 1%	--	-
Nitric acid < 90%	++	++
Nitric acid > 90%	+	+
Phosphoric acid - all concentrations	++	++
Sulphuric acid < 5%	+	++
Sulphuric acid 20%	-	+
Sulphuric acid 40%	--	-
Sulphuric acid 80%	+	++
Sulphuric acid > 95%	++	++
Aliphatic hydrocarbons	++	++
Aromatic hydrocarbons	++	++
Alcohols	++	++
Glycols	++	++
Dry chlorinated solvents	+	++
Dry chlorinated solvents + moisture	-	+
Ketones	++	++
Terpenes	++	++

Resistance to chemical agents at ambient temperature with respect to a risk of exposure by sprinkling.

++ Excellent resistance (continuous exposure), + Good resistance (long exposure).

- Limited resistance (momentary exposure is possible), -- Low resistance (exposure should be avoided).

⁽¹⁾ Avoid in the event of exposure to acidic foodstuffs such as white wine or mustard.

⁽²⁾ Recommended in a chlorinated or marine environment (except tidal zones).

5.2 Corrosion resistance

304 L stainless steel:

- to salt spray (BS) 1000 hrs

- to sulphur dioxide (SO₂) 500 hrs

316 L stainless steel:

- to salt spray (BS) 2000 hrs

- to sulphur dioxide (SO₂) 1000 hrs

5.3 Environmental capacities

Climatic conditions		304 L	316 L
Inside	Dry	Excellent	
	Damp	Excellent	
	Damp and aggressive	OK	
Outside	Rural	Excellent	
	Urban	Excellent	
	Industrial	OK	
	Tropical	OK	
	Marine		Excellent
Temperature and hygrometry	Cold	Excellent	
	Very cold	Excellent	
	Temperate (Europe)	Excellent	
	Hot and dry (North Africa)	Excellent	
	Damp	OK	

5.4 Use

In zones requiring rigorous hygiene, for example:

- food and beverage industries,
- distilleries,
- industrial kitchens,
- dairies,
- clean rooms.

In corrosive environments, for example:

- chemical industries,
- pharmaceutical industries,
- petroleum industries,
- paper industries.

304 L stainless steel resistance characteristics:


- nitric acid ≤ 52 % at all temperatures and ≤ 98 % cold
- cold-diluted organic acids,,
- salt solutions except chlorides, sulphides and sulphates,
- fresh water and natural atmosphere low in chlorides,
- foodstuffs except mustard and white wine.

316 L stainless steel resistance characteristics:


- phosphoric acids - all concentrations ≤ 40° C,
- sulphuric acids < 10 % and > 80 % at 20° C,
- sulphonc compounds ≤ 70° C,
- sulphide vapours and solutions, even boiling,
- salt solutions except chloride,
- alkaline solutions - all concentrations < 100° C,
- fresh water and natural atmosphere (particularly marine conditions),
- organic, food and pharmaceutical compounds.

6. DIMENSIONS (mm) SHEET STEEL

6.1 Overall dimensions



Note: dimension C does not include the lock.
Lock thickness: 4 mm

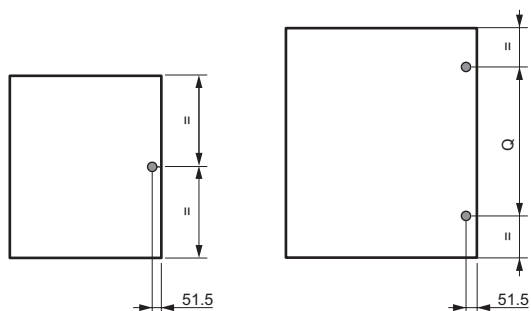


Cabinet dimensions			Dimensions (mm)			
Height	Width	Depth	A	B	C	Q
300	200	160	301.6	199.6	161.5	
400	300	200	401.6	299.6		
500	400	200	501.6	399.6	201.5	250
600		200	601.6			350
		250			251.5	400
700	500		702.4	500		
800	600	300	802.4	500		500
1000	800	300	1003.6		301.5	600
1200		300	1203.6	800.6		700
1200	1000	300	1203.6		301.5	
1400	800	400	1401	800.6	401.5	900

Sheet steel thickness:

- for height ≤ 600 mm: 10/10°
- for height 700 and 800 mm: 12/10°
- for height ≥ 1000 mm: 15/10°



7. EFFECTIVE SURFACE AREAS

7.1 Front panel

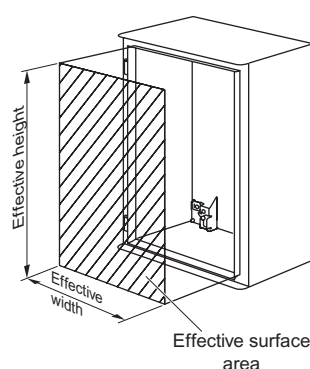


Cabinet dimension		Effective space (mm)	
Height	Width	Height	Width
300	200	262	160
400	200	362	260
500	400	462	360
600		562	
700	500	662.4	460
800	600	762.4	560
1000	800	963	760
1200		1163	
1400		1360	


7.2 Plain plate door for 1-door cabinet



Ground stud
Cabinets with H = 400



Cabinets with H 500 and 600



Cabinets with H = 600

Locking points


- one only for H ≤ 400,
- 2 for H ≥ 500.

Direct closure by cam on each lock.

Cabinet dimension		Dimensions (mm)						Effective surface area (dm²)
Haut.	Larg.	A	B	C	D	E	Q	
300	200				256	153.5	centred	3.55
400	300	175		275	356	253.5		8.64
500	400	275		375	456	353.5	250	15.42
600				475	556		350	18.95
700	500	375	274	575	656	453.5	400	29.05
800	600	475	324	675	756	553.5		41.15
1000	800	675		424	875	956	600	71.38
1200				524	1075	1156	700	86.46
1400				624	1275	1350	900	100.55

7. EFFECTIVE SURFACE AREAS (continued)

7.3 Plain plate door for 2-door cabinet

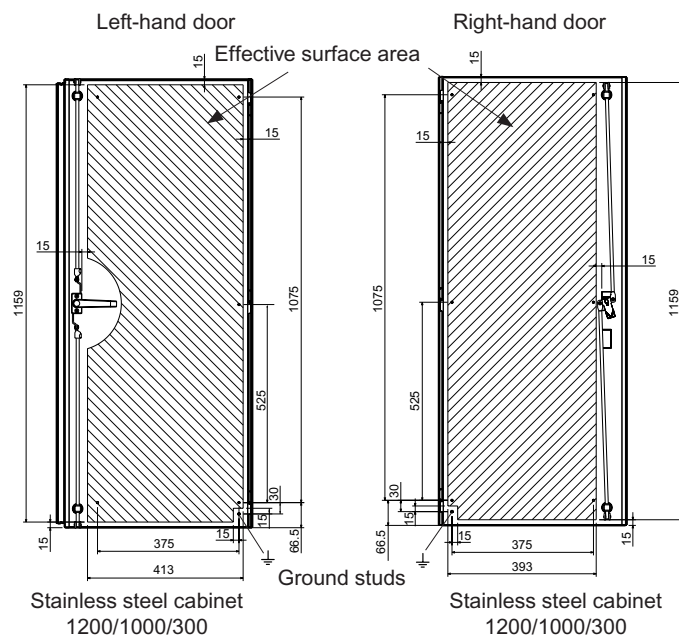


Locking point:

Three-point closure with handle and lock bolt for the right-hand door, and two-point closure with internal central handle and lock bolts.

Cabinet dimension	Effective surface area (dm ²)	
	Right-hand door	Left-hand door
1200 x 1000 x 300	45.5	46.1

7.4 Door with window

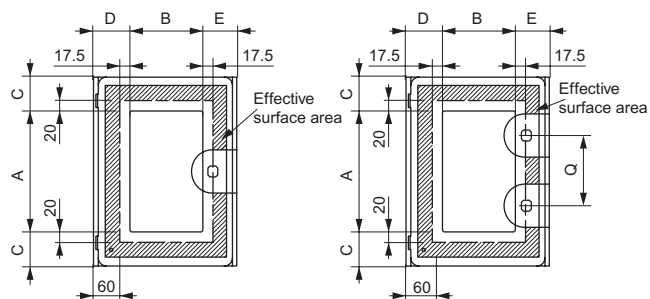

Cabinets with = H 400


Cabinets for H ≥ 500

Cat. No.			Dimensions (mm)				
	Height	Width	A	B	C	D	E
352 21	400	300	300	128	46.3	79.25	88.25
352 22	500	400	400	228			
352 25	600		500				
352 26	700	500	600	328		79.7	88.7
352 31	800	600	700	428			
352 33	1000	600	850	628	71.3	80.25	89.25

8. FIXING EQUIPMENT

Direct attachments: either Ø 9 screws or M8 studs.


Fixing lugs: see section 10.4 "Fixing lugs".



Cabinet dimension		Dimensions (mm)							
Height	Width	Cabinet back		Horizontal lugs		Vertical lugs		Maximum dimensions	
		E	F	T	U	R	S	V	Y
300	200	225	169	250	250	353	150	395	292
400	300	325	269	350	350	453	250	495	392
500	400	425	369	450	450	553	350	595	492
600		525		550		653		695	
700	500	625	469	650	550	753	450	795	592
800	600	725	569	750	650	853	550	895	692
1000	800	925	769	950	850	1053	750	1095	892
1200		1125		1150		1253		1295	
1200	1000	1125	969	1150	1050	1523	950	1295	1092
1400	800	1325	769	1350	850	1450	750	1492	892

9. EQUIPMENT POSITIONING


9.1 Fixing distances in the cabinet

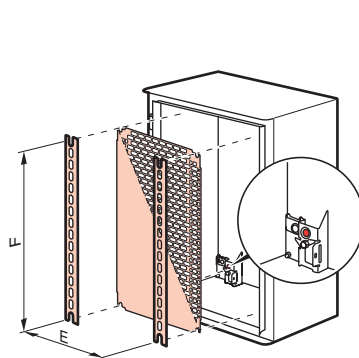


Cabinet dimension		Dimensions (mm)	
Height	Width	F	E
300	200	225	125
400	300	325	225
500	400	425	325
600		524	
700	500	625	425
800	600	725	525
1000	800	925	
1200		1125	725
1200	1000	1125	925
1400	800	1325	725

9. EQUIPMENT POSITIONING (continued)


9.2 Fixing distances on the door



Cabinets with H 400



Cabinets with H 500 and 600





Cabinets with 1 door 700 ≤ H ≤ 1400

Cabinet		Dimensions (mm)				
Height	Width	A	B	C	D	E
300	200				256	153.5
400	300	175		275	356	253.5
500	400	275		375	456	353.5
600				475	556	
700	500	375	274	575	656	453.5
800	600	475	324	675	456	553.5
1000	800	675	424	875	956	754
1200			524	1075	1156	
1400			624	1275	1350	

Left-hand door


Right-hand door

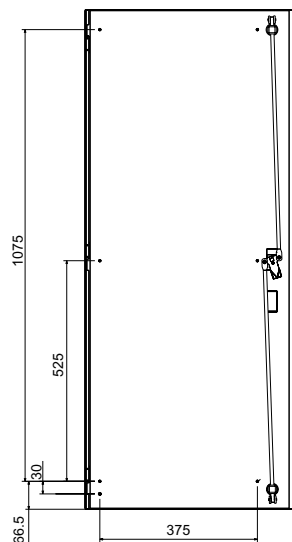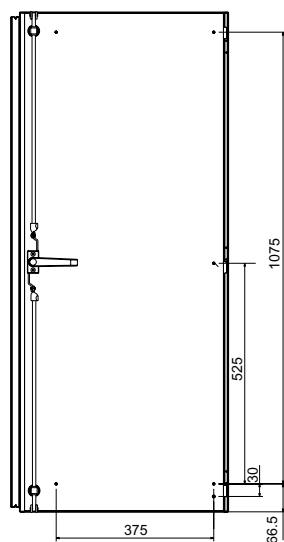

1200 x 1000 x 300 cabinets

9. EQUIPMENT POSITIONING (continued)


9.3 Depth positioning

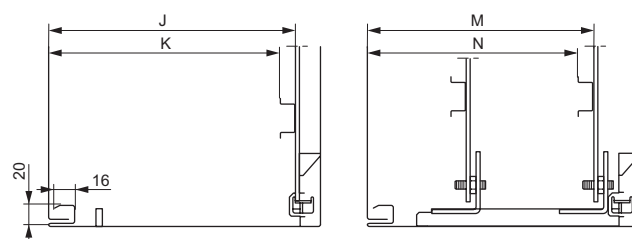


Cabinet depth	To cabinet back (mm)		Slide Cat. No.	Positioning with slides (mm)			
	J	K		M		N	
				min.	max.	min.	max.
160	140	125					
200	180	165					
250	230	215	367 43	93	213	78	198
300	280	265	367 44		263		248
400	380	365	367 45		363		348

10. EQUIPMENT

10.1 Direct mounting of equipment at back of cabinet (M8 screws)



- or slide with M8 nut adjustment (optional)




Equipment adjustment

Possible for 600 x 600 cabinet and beyond.

With Cat. No. 367 43/44/45.

Set of 4 slides for cabinet depths 250, 300 and 400

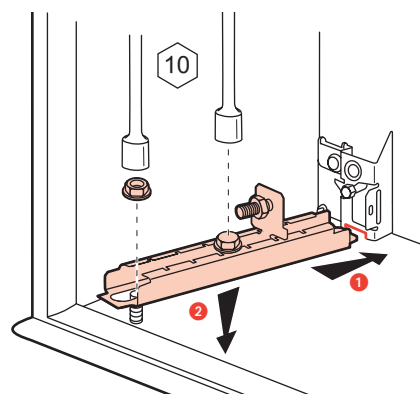


10. EQUIPMENT (continued)


10.2 Lina 12.5 and Lina 25 plain plates.

- Galvanised steel plain plates and Lina 12.5
- Lina 12.5: with holes for the installation of equipment without marking, automatic alignment.
- Lina 25: zinc-plated steel.

Lina 12.5

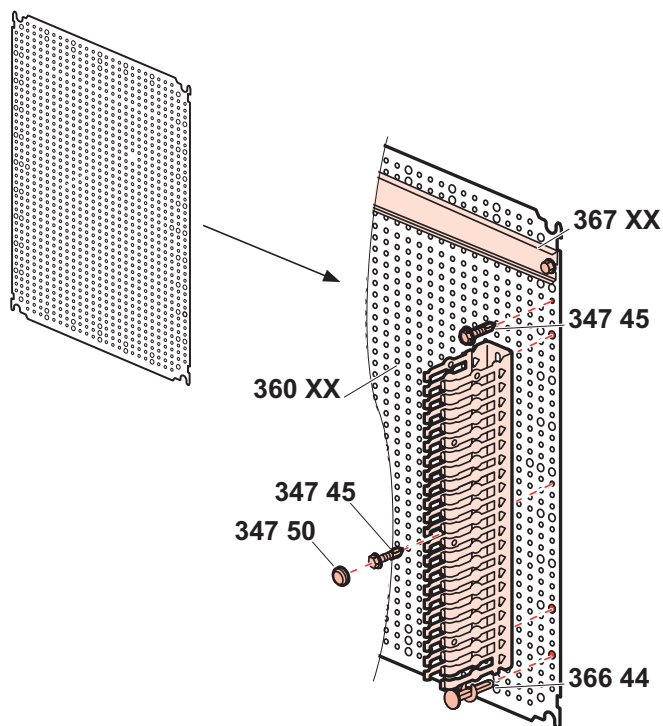

Lina 25

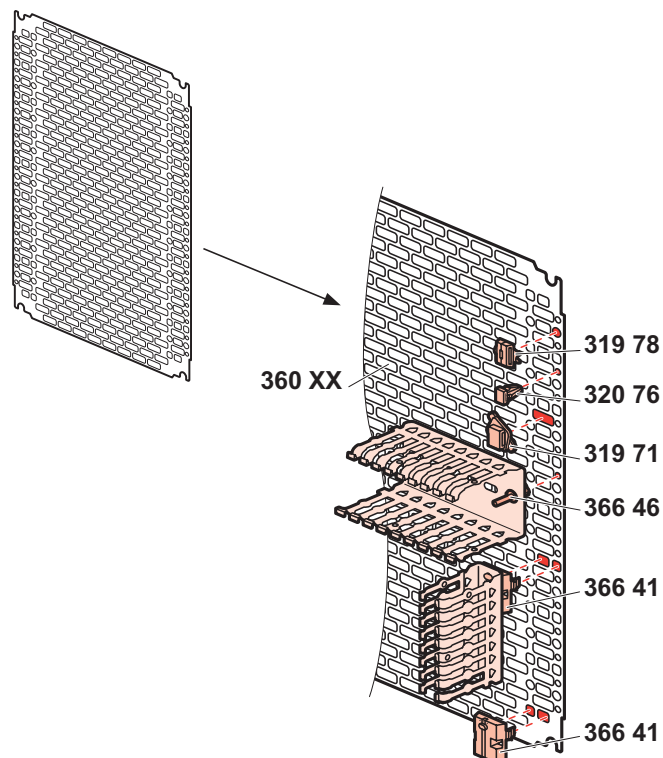


10. EQUIPMENT (continued)

10.2 Lina 12.5 and Lina 25 plain plates. (continued)


• Dimensions

Lina 12.5 plain plates and Lina 25 perforated plates.


Plain

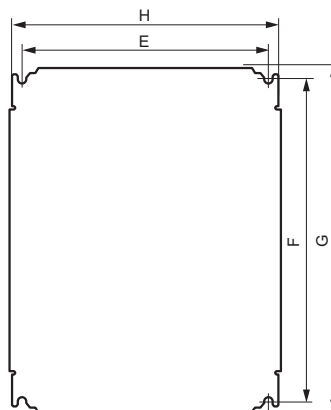

Lina 12.5 details

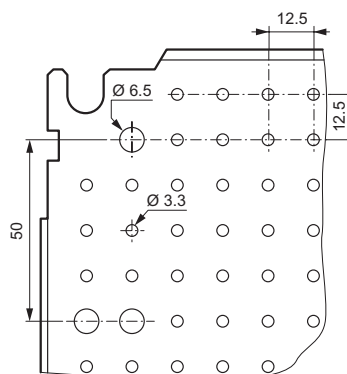

Lina 25 perforated details

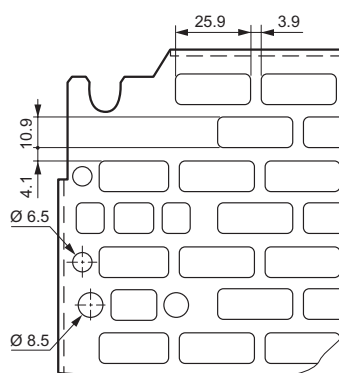

10. EQUIPMENT (continued)

• Dimensions (mm) (continued)

Lina 12.5 plain plates and Lina 25 perforated plates



Cabinets		Lina 12.5 or Lina 25 plain plates		Effective surface area for equipment (dm ²)	Mounting of plates		Plain	Lina 12.5	Lina 25
Height	Width	G	H		F	E	Cat. No.	Cat. No.	Cat. No.
300	200	256	156	4.2	225	125		360 00	360 07
400	300	356	256	8.2	325	225	360 52	360 04	360 12
500	400	456	356	15.2	425	325	360 55	360 09	360 15
600	400	556	356	18.7	525	325	360 56	360 22	360 16
700	500	656	456	28.7	625	425	360 58	360 31	360 18
800	600	756	556	40.7	725	525	360 59	360 33	360 19
1000	800	956	756	70.7	925	725	360 61	360 42	360 21
1200	800	1156	756	85.7	1125	725	360 64	360 46	360 87
1200	1000	1156	956	108.7	1125	925	360 65	360 47	360 88
1400	800	1356	756	100.7	1325	725	360 67	360 75	360 90

10.3 Sectioned uprights and Lina 25 rails to create a frame

Lina 25 sectioned uprights


Cat. Nos. 361 50/51/52/53/54/55/56

Cat. Nos. 361 58/59



Sectioned uprights to be cut

Cat. No. 361 92




⁽¹⁾Prescribed sawing line for upright height step of 25.
The other two provide the height of uprights Cat. Nos. 361 50/51/52/53/54/55/56.

Cabinets height (mm)	Upright lenght (mm)	Upright Cat. No. (set of 2)
300	237	361 50
400	337	361 51
500	437	361 52
600	537	361 53
700	637	361 54
800	737	361 55
1000	937	361 56
1200	1137	361 58
1400	1337	361 59
Upright to be cut, length 3 m		361 92


10. EQUIPMENT (continued)

10.4 Rails



Cat. No. 374 02



Cat. No. 477 22



Cat. Nos. 367 80/81/82/83/84/85/86 Cat. No. 477 23
374 07



Cabinet width (mm)	Rail length (mm)	Rail Cat. No.
300	243	367 80
400	343	367 81
500	443	367 82
600	543	367 83
800	743	367 84
1000	943	367 85
1200	1143	367 86

2m rail to be cut


Cat. No. 374 02 asymmetrical to the EN 60715 standard

Cat. No. 374 07 symmetrical depth 15 mm

Cat. No. 477 22 symmetrical depth 7.5 mm with oblong slots

Cat. No. 477 23 symmetrical depth 15 mm with oblong slots.

Frame assemblies with Lina 25 rails and uprights

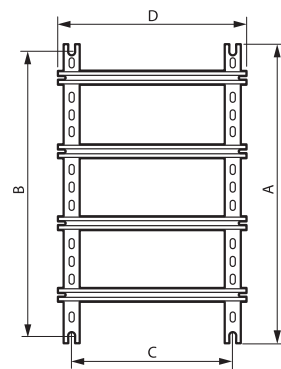


10. EQUIPMENT (continued)

Frame assemblies with Lina 25 rails and uprights (continued)

Envelope dimensions (mm)		Height of uprights	Rail length	Frame mounting	
Height	Width	A	D	B	C
400	300	337	243	325	225
500	400	437	343	425	325
600	400	537	343	525	325
700	500	637	443	6625	425
800	600	737	543	725	525
1000	800	937	743	925	725
1200	800	1137	743	1125	725
1200	1000	1137	943	1125	925
1400	800	1337	743	1325	725

10.5 RAL 7035 internal doors

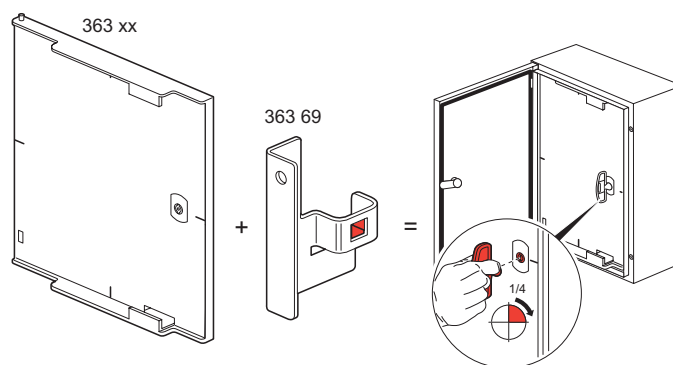

Mounted using Cat. No. 363 69.

IP xxB

Glass fibre-filled polyester, thickness: 4 mm.

Self-extinguishing at 960°C according to the IEC EN 60695-2-11 standard.

Grid integrated into the rear panel.

Centre marked on front panel.

Distance between cabinet door and adjustable internal door: 42 to 50 mm for Atlantic cabinets.

Left or right opening with built-in grip.

Captive hinge pins.

Double bar lock: 1 lock for height 400 to 600 mm, 2 locks from 700 mm height.


Compatible with key cylinders and other imprints

Cabinets H x L	Dim. (mm) Height x width	Effective dim. (mm) Height x width.	Inner door Cat. No.
400 x 300	341 x 236	305 x 185	363 59
500 x 400	441 x 336	405 x 250	363 60
600 x 400	541 x 336	505 x 250	363 61
700 x 500	642 x 436	500 x 340	363 62
800 x 600	742 x 536	600 x 440	363 63
1000 x 800	942 x 736	800 x 640	363 64
1200 x 800	942 x 736	800 x 640	363 65 ⁽¹⁾

⁽¹⁾Door identical to Cat. No. 363 64 with 200 mm upper or lower reservation


10. EQUIPMENT (continued)

10.6 Chassis with RAL 7035 insulated faceplates

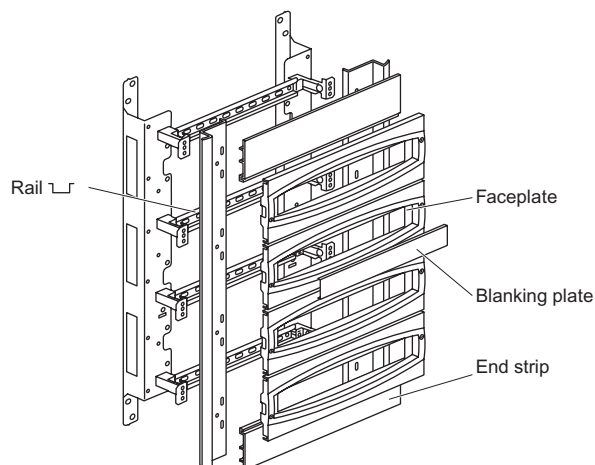

Cabinet	Chassis	
H x L x P (mm)	Cat. No.	Capacity
400 x 300 x 200	361 01	3 rows of 10 modules
500 x 400 x 200	361 02	3 rows of 16 modules
600 x 400 x 250	361 03	3 rows of 16 modules
700 x 500 x 250	361 05	4 rows of 21 modules
800 x 600 x 300	361 06	4 rows of 27 modules
1000 x 800 x 300	361 09	5 rows of 38 modules
1200 x 800 x 300	361 10	6 rows of 38 modules

Mounting plate for chassis





Chassis		Mounting plate	
Cat. No.	H x L x P (mm)	Cat. No.	For power devices
361 06	800 x 600 x 300	360 44	DPX 125, DPX 160 or Vistop 160A
361 09	1000 x 800 x 300	360 45	DPX 125, DPX 160 DPX 250 ER Vistop 160 A or Vistop 250 A
361 10	1200 x 800 x 300		

10. EQUIPMENT (continued)

10.7 VDI chassis


Used to integrate 19" VDI equipment into 800 mm wide, 300 mm deep stainless steel Atlantic cabinets
For 400 mm wide cabinets, the chassis accepts the integration of VDI equipment from the XL VDI mini cabinet.
Can be secured directly to the wall for a wall-mounted chassis (without cabinet).

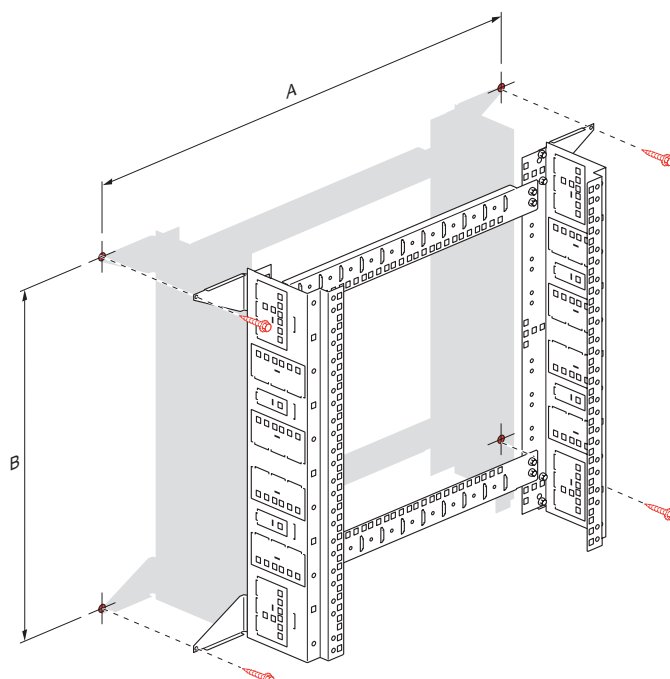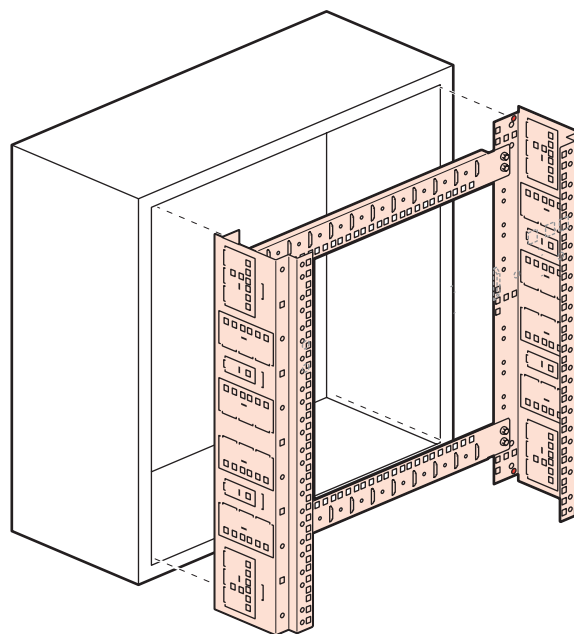

Cat. No.	A (mm)	B (mm)
462 28	725	525
462 29	725	725

10. EQUIPMENT (continued)

10.7 VDI chassis (continued)

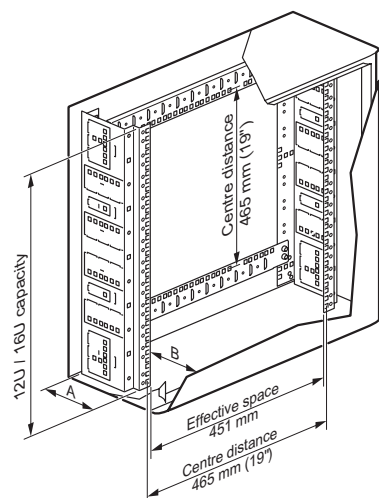

Atlantic cabinets					
Chassis Cat. No.	Capacity	Cat. Nos	Dimensions	Effective dimensions under door	
				A (mm)	B (mm)
462 28	12 U	352 05/25/45	600 x 400 x 250	145	105
462 29	16 U	352 11/31/47	800 x 600 x 300	145	155

10.8 Cabinet mounting

Directly to the wall or using mounting lugs.



304 L or 316 L stainless steel plate

Rated loading: 300 kg per cabinet.

Can be used for horizontal or vertical mounting.




Cat. No. 364 06/16



Cat. Nos.	Vertical lugs		Horizontal lugs					
	R	S	T	U	V	Y	E	F
352 00/40	350	150	250	250	392	292	225	169
352 01/21/41	450	250	350	350	492	392	325	269
352 02/22/42	550	350	450	450	592	492	425	369
352 03	650	350	550	450	692	492	525	369
352 04	350	350	250	450	392	492	225	369
352 05/25/45	650	350	550	450	692	492	525	369
352 06/26/46	750	450	650	550	792	592	625	469
352 07	450	350	350	450	492	492	325	369
352 08	450	550	350	650	492	692	325	569
352 09	650	550	550	650	692	692	525	569
352 11/31/47	850	550	750	650	892	692	725	569
352 12	850	750	750	850	892	892	725	769
352 13/33/53	1050	750	950	850	1092	892	925	769
352 14	1250	750	1150	850	1292	892	1125	769
352 15	1450	750	1350	850	1492	892	1325	769
352 16	1250	950	1150	1050	1292	1092	1125	969

11. ACCESSORIES

11.1 Hinged glass doors



IP 54

Anodised aluminium frame, opening to 120°.


Polycarbonate window, thickness 3 mm. Neoprene seal.

455 key lock.

Supplied with drilling template.

Protect devices, avoid unintentional operations and allow devices to be viewed from the front.


Cat. No.	Outside dimensions (mm)			Window dimensions (mm)		Effective depth (mm)
	Height	Width	Prof.	Height	Width	
475 45	300	400	50	230	330	42
475 46	400	400	50	330	330	42
475 47	500	500	50	430	430	42
475 48	600	400	50	530	330	42
475 49	600	600	50	530	530	42




Cat. No.	Dimensions (mm)			
	A	B	D	E
475 45	300	400	230	330
475 46	400	400	330	330
475 47	500	500	430	430
475 48	600	400	530	330
475 49	600	600	530	530

11.2 Self-adhesive plastic document holders

- **Cat. No. 365 80**, 340 x 235 mm (inside dimensions: 310 x 200 x 18 mm) and Cat. No. 365 81, 260 x 165 mm (inside dimensions: 230 x 130 x 18 mm).



- **Cat. No. 365 82**, 325 x 120 mm (inside dimensions: 324 x 120 x 18 mm). IP 50 closure RAL 9002. Capacity: approximately fifteen A4 sheets folded in half.

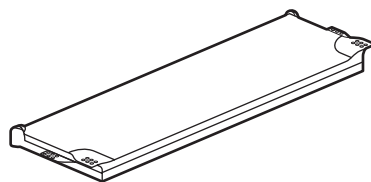

- **Réf. 097 99**, 305 x 220 mm (format A4) Transparent, flexible.

11. ACCESSORIES (continued)

11.3 Door contact


Cat. No. 363 13

3 A - 250 V

1 contact NF - 1 contact NO

For example, can shut off the air conditioning and power the lights when the door is opened.

Supplied with mounting lugs.



11.4 Lighting kit

Cat. No. 363 12

Supplied with 8 W fluorescent tube - Ø 16 mm - 230 V - 50 Hz

Class I - IP 20

Shielded in accordance with EN 50015

Equipped with a switch

Connection by strip

Dimensions: 350 x 61 37 mm

11.5 Protective conductor lug

Cat. No. 367 36

Set of two support brackets for copper bar or rail for terminal block.

