


Mosaic™ Universal IP 44 plate

Cat. No(s) : 788 80



788 80

1. USE

Weatherproof Mosaic plate for covering a 2-module mechanism.


2. RANGE

	Designation	Cat. No.	No. of modules	Fixing method	Weight (g)
	Universal IP 44 plate	788 80	2	With screws	32.81

3. PREPARATION


Mounts on 2-module support frame (802 51 and 802 61).

4. OVERALL DIMENSIONS

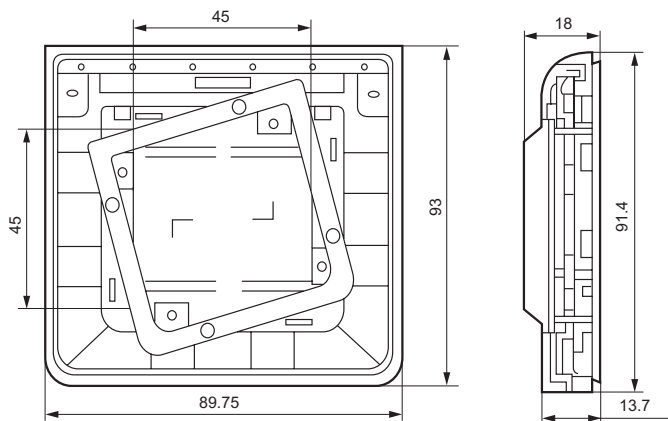

5. MOUNTING

Flush-mounting only.
The plate is screwed to the support frame by 4 screws (supplied)

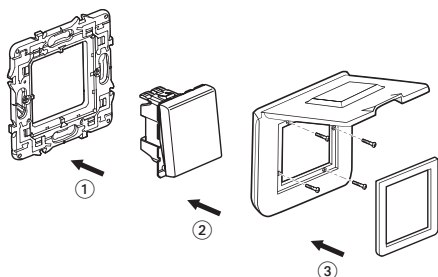

5. MOUNTING (continued)

- 1 - Clip the device to the support frame
- 2 - Screw the plate to the support frame
- 3 - Clip the insert to the plate.

6. TECHNICAL CHARACTERISTICS

6.1 Mechanical characteristics

Impact tests : IK04
Penetration by solid bodies/liquids : IP44

6.2 Material characteristics

Plate : ABS - SEBS (RAL 9003)
Flap cover : PP - SEBS (RAL 9003)
Antibacterial treatment based on ceramic loaded with silver stain : life-time of 5 years.
Self-extinguishing : 650°C / 30 s

6.3 Climatic characteristics

Storage temperatures : - 10°C to + 70°C
Operating temperatures : - 5°C to + 50°C

7. CLEANING

Surface cleaning with a cloth.
Do not use : acetone, tar remover, trichloroethylene.

7.1 Resistance to cleaning agents

Resistance to the following agents : Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Pure bleach diluted 10%, Glass cleaning substance, Pre-impregnated wipes.

7.2 Resistance to hospital-type cleaning agents

Resistance to the following agents : Anios, Surfanios, Bactilsine, Diluted hydrogen peroxide (35%).

Caution :

A preliminary test should be carried out if other specific cleaning products are to be used.

8. SPECIAL USE

Mosaic plates must not be painted.