


LV/ELV anti-pullout module Mosaic™

Cat. No(s) : 770 80



770 80

1. USE

Combined with a socket outlet, it prevents accidental disconnection of electrical appliances (photocopy machine, fax, etc.) by a cord pinching system (low or extra-low voltage).


2. RANGE

	Designation	Cat. No.	No. of modules	Fixing method	Weight (g)	Characteristics
	Anti-pullout module	770 80	1	with clips	15.12	For cable with Ø 4 mm to 8 mm


3. PREPARATION

The mechanisms can be flush-mounted or surface-mounted.


3.1 Preparation for a socket outlet

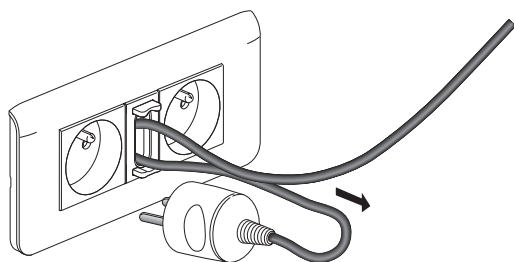


4. OVERALL DIMENSIONS

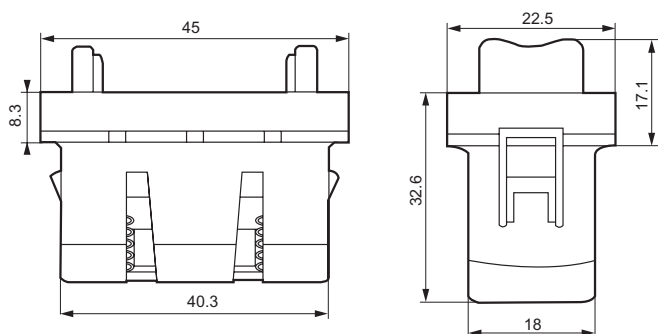

5. OPERATION

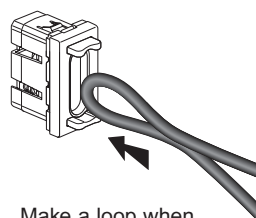

Make a loop when inserting the cable.

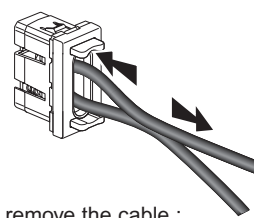

To remove the cable :
press the pushbutton and pull on the cable.

6. TECHNICAL CHARACTERISTICS

6.1 Mechanical characteristics

Impact tests : IK04
Minimum force : 350 N

6.2 Material characteristics

Base : Polycarbonate
Cover plate : ABS (RAL 9003)

6.3 Electrical characteristics

Self-extinguishing : 650°C / 30 s

6.4 Climatic characteristics

Storage temperatures : -10°C to +70°C
Operating temperatures : -5° to +50°C

7. CLEANING

Surface cleaning with a cloth.
Do not use : acetone, tar remover, trichloroethylene.

7.1 Resistance to cleaning agents

Resistance to the following agents : Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

7.2 Resistance to hospital-type cleaning agents

Resistance to the following agents : Anios, Surfanios, Bactilysine, Diluted hydrogen peroxide (35%).

Caution : A preliminary test should be carried out if other specific cleaning products are to be used.