



Mosaic™ blanking plates

Cat. No(s) : 770 70/71 792 70/80

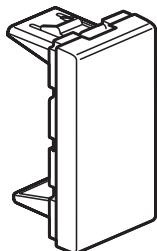

770 70 / 792 70

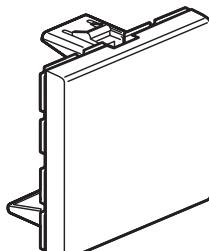

770 71 / 792 80

1. USE

Mosaic blanking plates pre-equipped for fixing of a printed circuit.


2. RANGE

	Designation	Cat. No.	No. of modules	Fixing method	Weight (g)
	Blanking plate	770 70	1	With clips	4.5
	Blanking plate, aluminium finish	792 70	1	With clips	4.5
	Blanking plate	770 71	2	With clips	7.5
	Blanking plate, aluminium finish	792 80	2	With clips	7.5


3. PREPARATION

The mechanisms can be flush-mounted or surface-mounted.
Modular mechanisms using adapter Cat. No. 802 99 (2 modules).
The mechanisms are mounted on thin walls using adapters Cat. No. 802 90 (1 module), Cat. No. 802 91 (2 modules), Cat. No. 802 92 (2 x 1 vertical modules).

4. OVERALL DIMENSIONS

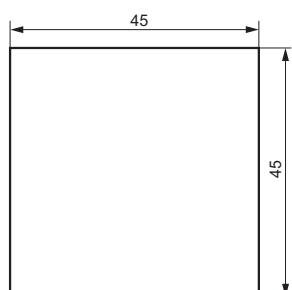


770 71 / 792 80

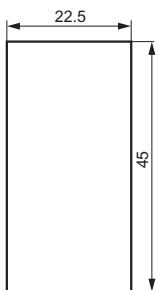

770 70 / 792 70

4. OVERALL DIMENSIONS (cont'd)

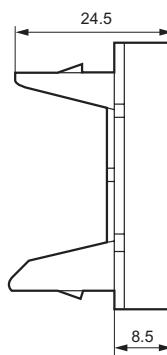

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics

Impact tests : IK 04
Penetration by solid/liquid bodies : IP 41 (C15-100)

5.2 Material characteristics

Cover plate : ABS (RAL 9003)

5.3 Electrical characteristics

Self-extinguishing : 650°C / 30 s

5.4 Climatic characteristics

Storage temperatures : - 10°C to + 70°C

Operating temperatures : - 5°C to + 50°C

6. CLEANING

Surface cleaning with a cloth.

Do not use : acetone, tar remover, trichloroethylene.

6.1 Resistance to cleaning agents

Resistance to the following agents : Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

6.2 Resistance to hospital-type cleaning agents

Resistance to the following agents : Anios, Surfanios, Bactylsine, Diluted hydrogen peroxide (35%).

Caution : A preliminary test should be carried out if other specific cleaning products are to be used.