


**Céliane™  
Chimes**

Cat. No(s): 675 41/42



675 41 / 675 42

**1. USE**


Sound signalling

**2. RANGE**

Description	Cat. No.	No. of modules	Connection method	Weight (g)	Characteristics
Chime 230 V	675 41	2	Screw terminals	49	230 V / 13 melodies 2 inputs
Chime 8-12 V	675 42	2	Screw terminals	49	8-12 V / 13 melodies 2 inputs


**3. FITTING**

The mechanisms can be flush-mounted or surface-mounted.

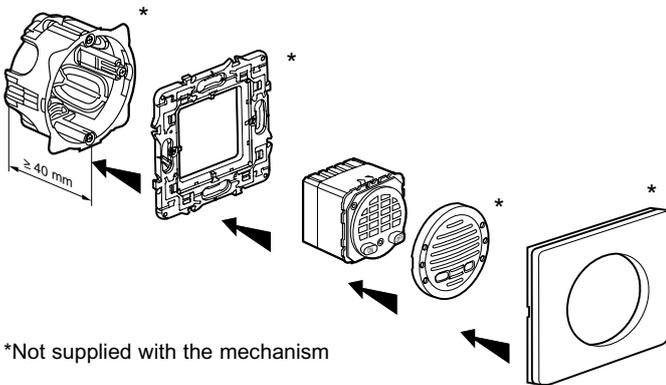

\*Not supplied with the mechanism

**4. OVERALL DIMENSIONS**

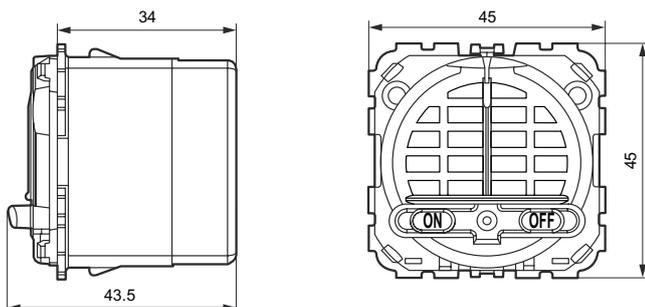


**5. CONNECTION**


Terminal type: screw terminals  
Min. terminal capacity: 2 x 1.5 mm<sup>2</sup>.  
Stripping length: 8 mm  
Type of screwdriver: flat-blade screwdriver 3.5 mm, PZ 00, 0 or 1  
Tightening 0.5 Nm

**Wiring diagrams**


**Cat. No. 675 41**

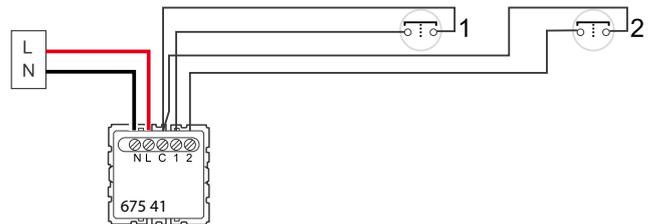

**Cat. No. 675 42**

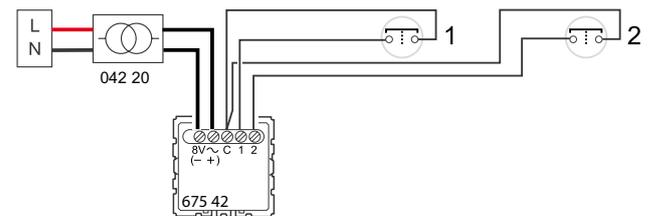

**Cat. No. 675 42 with illuminated pushbutton Cat. No. 416 47 and lamp Cat. No. 898 26**

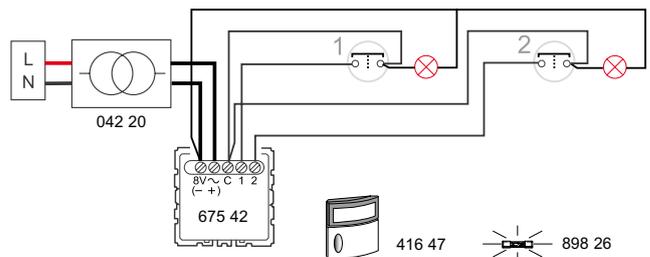

## 6. OPERATION

The chimes can combine 2 separate melodies for the two pushbutton inputs out of a total of 13 melodies.

The 8 V chime is mainly used when the call pushbutton is located on the outside so it can be powered at ELSV (extra low safety voltage). The 230 V chime will be preferably installed when the call pushbutton is not located on the outside.

## 7. TECHNICAL DATA

### 7.1 Mechanical characteristics

	Product mounted with no cover plate	Product mounted with cover plate
Impact tests : IK	04	04
Penetration by solid/liquid bodies : IP	30	41

### 7.2 Electrical characteristics

Cat. Nos	DC voltage	AC voltage	Frequency:	Consumption:
675 41	-	230 V + 10% / - 15%	50 Hz	69 mA (same in use)
675 42	12 V	8 V	50 / 60 Hz	116 mA in use

### 7.3 Climatic characteristics

Storage/operating temperatures: - 10°C to +55°C

### 7.4 Sound characteristics

Sound level: 56 to 85 dB (A) at 1 m

## 8. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene

## 9. ACCESSORIES

- Cover plates:



White Cat. No. 682 01

Titanium Cat. No. 685 01

- Transformers:



Cat. No. 432 20 up to 3 chimes Cat. No. 675 42

Cat. No. 432 25 up to 6 chimes Cat. No. 675 42

CEI 62 080  
NF C61 730