


# Céline™ Control for skylight

Cat. No(s).: 676 04




## 1. USE

Control mechanism for skylight.


## 2. RANGE

	Description	Cat. No.	Weight (g)
	Control for skylight	676 04	30.9

## 3. OVERALL DIMENSIONS

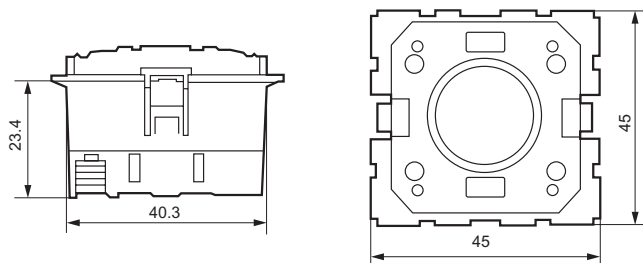

## 4. FITTING

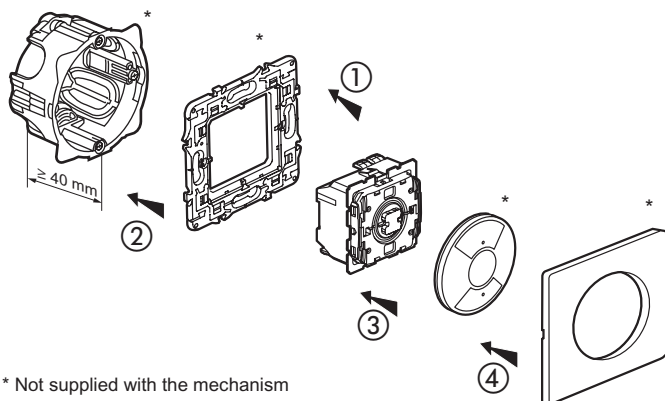

\* Not supplied with the mechanism

## 4. FITTING (cont'd)

- 1 - The mechanism is clipped to the support from the front.
- 2 - The mechanism/support assembly is screwed to the flush-mounting box.
- 3 - The cover plate (rocker + ring) is clipped to the mechanism
- 4 - The plate is clipped to the support.

Can be fitted with the full range of Céline finishes.  
Vertical or horizontal multi-gang mounting.


## 5. CONNECTION

Terminal type: automatic

Stripping: 13 mm


Min. terminal capacity: 2 x 2.5 mm<sup>2</sup>

Switch wiring:

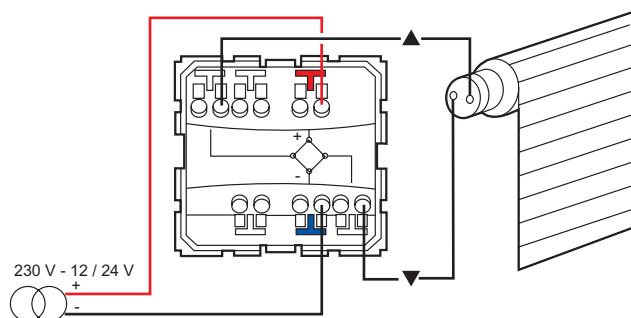

## 6. OPERATION

For DC control of a skylight motor by polarity inversion.

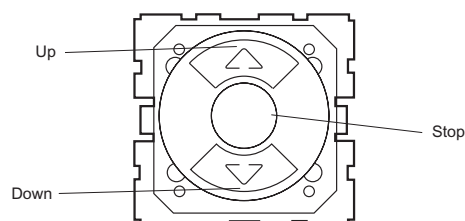

## Control for skylight

### 7. TECHNICAL DATA

#### 7.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid/liquid bodies: IP 41 (C15-100) } Without rocker

#### 7.2 Material characteristics

Base: Polycarbonate

#### 7.3 Electrical characteristics

Self-extinguishing: 650° C / 30 s.

Voltage: 24 VDC

Current: 3 A

#### 7.4 Climatic characteristics

Storage temperatures: - 10° C to + 70° C

Operating temperatures: - 5° C to + 50° C

### 8. CLEANING

No cleaning.