




Céliane™ Leather finish plates

Cat. No(s): 692 81/82/83/84/85/87/88/89/91/92/93/94/95
692 97/98/99
694 01/02/03/04/05/07




1. GENERAL CHARACTERISTICS

Plates covering 1- to 4-gang mechanisms.


2. RANGE

Designation		1-gang	2-gang	3-gang	4-gang	4/5 modules plate	Special for renovation		Special plate
							2-gang centre distance 57 mm	3-gang centre distance 57 mm	
Leather finish	Camel leather plate	692 81	692 82	692 83	692 84	692 85	692 88	692 89	692 87
	Wine-coloured leather plate	692 91	692 92	692 93	692 94	692 95	692 98	692 99	692 97
	Brown-coloured leather plate	694 01	694 02	694 03	694 04	694 05	-	-	694 07
	Weight (g)	31	46	59	71	36	41	73	88

3. OVERALL DIMENSIONS

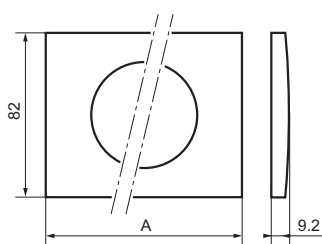

Cat. No.	A (mm)
692 81/91 - 694 01	100
692 82/92 - 694 02	171
692 83/93 - 694 03	242
692 84/94 - 694 04	313
692 85/95 - 694 05	171
692 88/98	157
692 89/99	214
694 07/87/97	159

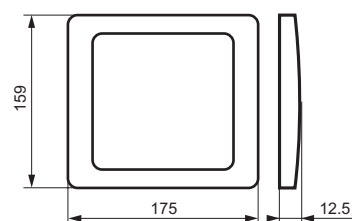

Cat. Nos
692 87/97
694 07

4. MOUNTING

The plates snap onto the screw-type or claw-type support frames: notches allow adjustment to compensate for thickness differences (example: wall carpeting). Easy to remove using a screwdriver via the slots on the side of the plate.

5. TECHNICAL DATA

5.1 Mechanical characteristics

Impact resistance: IK 04

5.2 Material characteristics

Materials: wood + cowhide + polycarbonate
Self-extinguishing: 650 °C / 30 s.

5.3 Climatic characteristics

Storage temperature: -10 °C to +70 °C
Operating temperature: - 5 °C to +50 °C

6. CLEANING

For Camel leather plates: No cleaning. Major risk of deterioration with the application of any cleaning products or even water.

For wine- and brown-coloured leather plates: Clean the surface once a month using a slightly damp cloth. Do not apply solvent, alcohol or any other cleaning product.

7. SPECIAL USE

Paint must not be applied to the plates.