



## Flush mounted loudspeaker

5739 28 (White)  
5739 29 (Magnesium)



### Description

100 W, 8  $\Omega$  impedance, flush-mounting loudspeaker, for installation inside appropriate boxes. Preset for back installation of a DIN amplifier, 035 85.

### Technical data

Type:	2 separate ways
Power:	50 Wrms/100 W musical
Impedance:	8 $\Omega$
Frequency range:	50 – 20 kHz
Sensitivity:	88 dB (1 W/1 m)
Feature:	loudspeaker to be installed in flush-mounted boxes. The loudspeaker has a compartment for the installation of the DIN 035 85 amplifier.
Weight:	1.74 kg
Depth of the flush-mounting box:	80 mm

### Installation

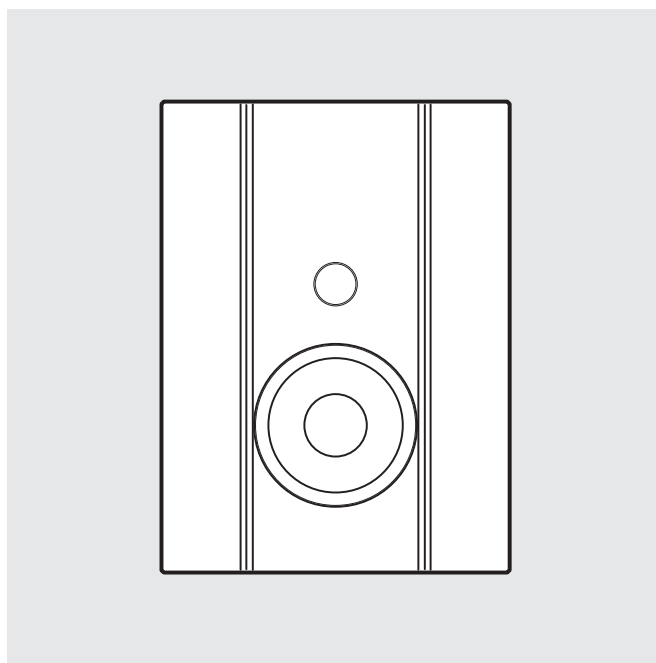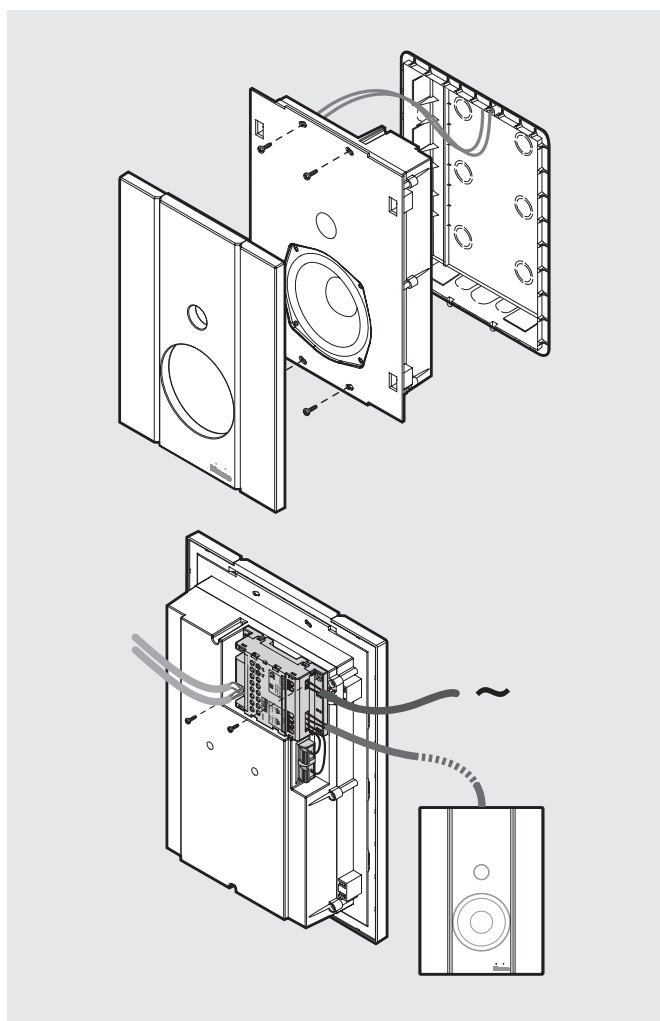

### Dimensional data

