


False celing mounted loudspeaker

Description


The dimensions, the same as a ceiling-mounted panel (60x60 cm), make it particularly suitable for rooms of the service sector. This ultra-flat (only 5 mm thickness) and light loudspeaker has a power of 50 W.

Technical data

Type:	acousticPanel® DML
Power:	25 Wrms/50 W musical
Impedance:	8 Ω
Frequency range:	90 - 18 kHz
Sensitivity:	87 dB (1 W/1 m)
Feature:	loudspeaker to be installed in the false ceiling, replacing the false ceiling panel (60x60 cm)
Weight:	1.74 kg

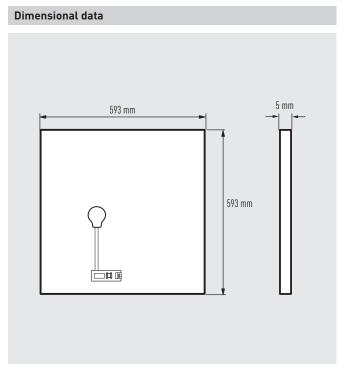

SCS BUS SYSTEM LG00088-b-UK





5739 83