



Flush mounted loudspeaker


673 03

Description

The loudspeakers must be installed inside suitable boxes, and do not need any supporting frame, as all accessories are supplied.

Technical data

Type:	broadband
Power:	6 Wrms/12 W musical
Impedance:	16 Ω
Frequency range:	160 -16 kHz
Sensitivity:	80 dB (1 W/1 m)
Feature:	loudspeaker to be installed in suitable flush-mounted boxes: 893 79 and 892 79.

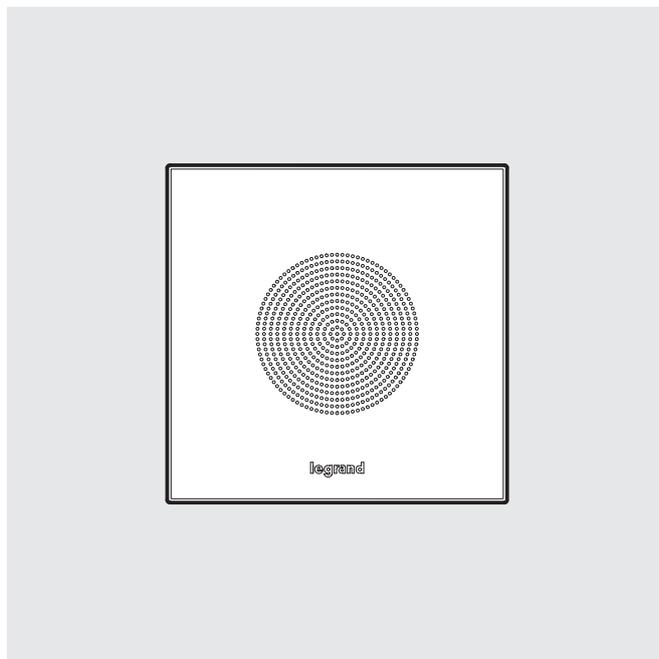

Dimensional data

