

## 1. GENERAL CHARACTERISTICS

Plug-in connector for ACO RJ 11 type double socket  
For sockets Cat. No. 742 40 and 888 40

## 2. MOUNTING


Clip-on fitting on Legrand ACO Mosaic or Diplomat sockets  
Mosaic: use socket Cat. No. 742 40 + support frame Cat. No. 748 02 or multi-gang + plate Cat. No. 750 02 or multi-gang  
Diplomat: use socket Cat. No. 888 40 + cover plate Cat. Nos. 888 56/66 + plate Cat. Nos. 883 01/51 - 884 01/45 - 885 01/11/21/31/41/51 - 888 01/45

Mounting possible on AMPACO box

## 3. TECHNICAL CHARACTERISTICS


Printed circuit mounted on thermoplastic support frame  
Tool-free connection by means of insulation displacement  
Operating temperature: - 5 to + 40° C

### 3.1 Connection

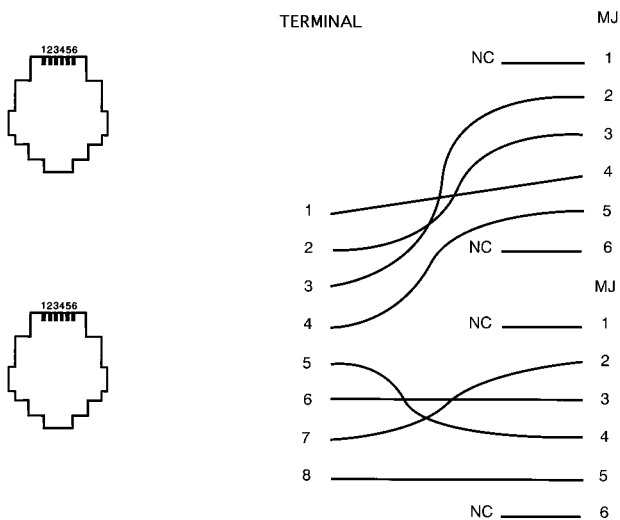

## 3. TECHNICAL CHARACTERISTICS *(continued)*

### 3.2 Module performance

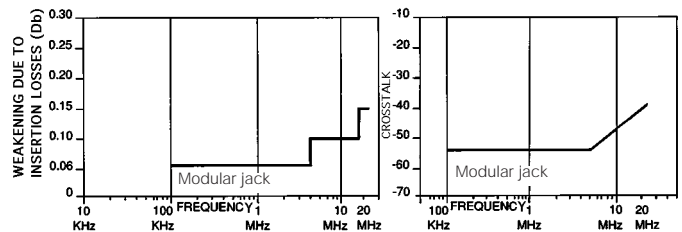

(1) AMP licence compatible with AMPACO