


Valena™ Life

Double socket outlets - Franco-Belgian standard

Cat. No(s): 7 531 86/87 - 7 532 86/87 - 7 533 86/87

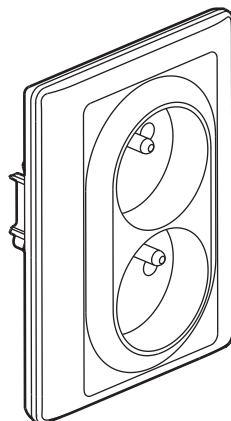

1. USE


2 x 2 P+E compact socket outlets.
Mechanisms supplied complete with cover plate and plate.
Supplied with site protection cover.
Installation in 1-gang flush-mounting box, allows replacing one socket by two sockets without changing mounting box.
Flush-mounting or surface-mounting.

2. RANGE

Description	White	Ivory	Aluminium
Double socket 2 x 2 P+E with shutters	7 531 86	7 532 86	7 533 86
Double socket 2 x 2 P+E without shutters	7 531 87	7 532 87	7 533 87

3. OVERALL DIMENSIONS (mm)

Cat. No: 7 531 86

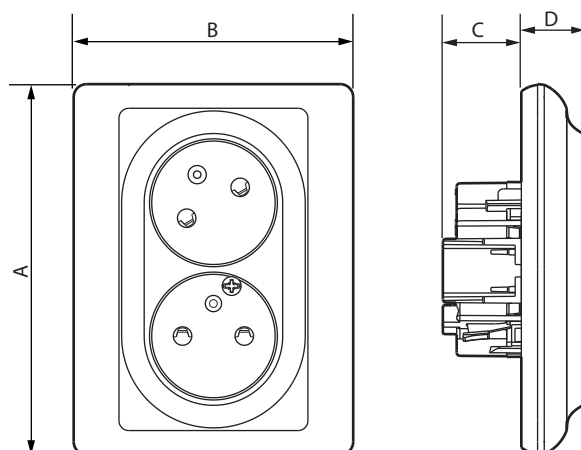

References	A	B	C	D
7 531 86 - 7 532 86 - 7 533 86	98.4	71	24.25	19.2

4. CONNEXION

Automatic terminals
Capacity: 2 x 2.5 mm²
Stripping length: 13 mm
Flexible or rigid cables compatible

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
Protection against impact: IK 04

■ 5.2 Material characteristics

Polygloss appearance

Colour: - White RAL 903
- Ivory RAL 113
- Aluminium

Material: - Plate ABS

- Socket cover plate: Polycarbonate
- Halogen free
- UV resistant

Material of the support: - Polycarbonate grey RAL 737 + Metal
- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place
+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage and usage temperature: - 5° C to + 35° C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.